




MULTISTAGE BOOSTER PUMP



SHOWER PANNELS • R.O.PLANTS • GARDENING • WATER SUPPLY • WASHING SYSTEM • HEATING/ BOILER SYSTEM • SPRINKLING SYSTEM

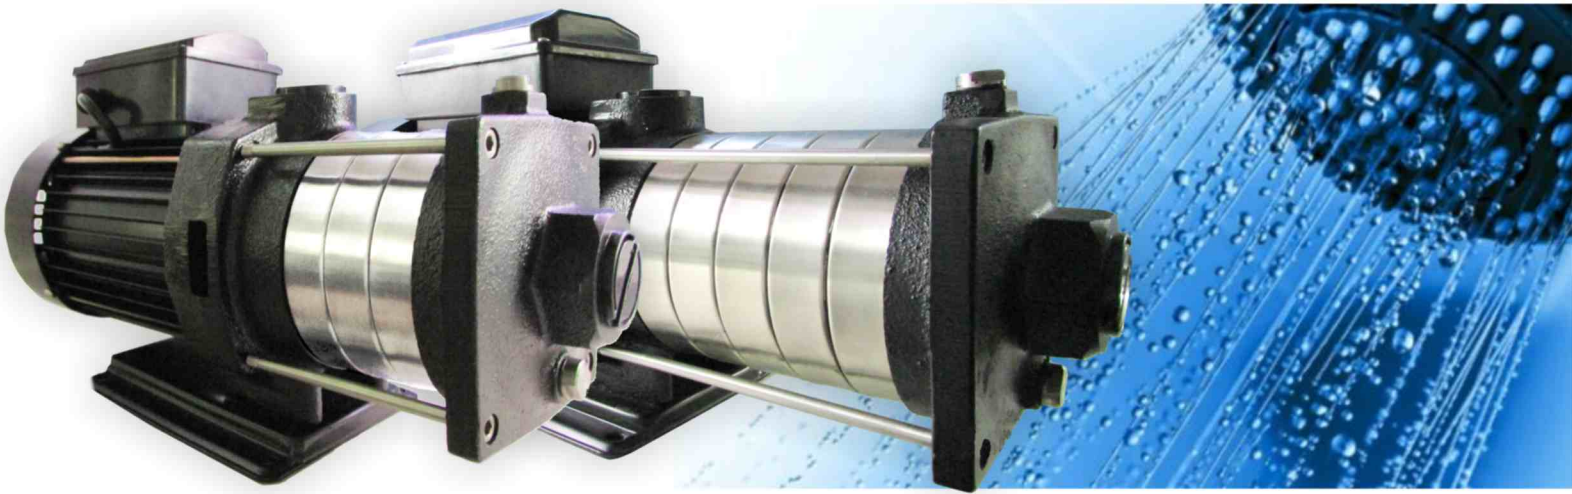



FEATURES

Stainless steel Diffusers and Impellers
Stainless steel shaft
Ceramic and graphite mechanical seal

Precisely Designed winding

Thermal-cut out relay

Insulation class F
Protection IP 44

Improved vertical tank with
pressure switch

BENEFITS

Noiseless, wear resistance
Low maintenance, extended pump life

Designed for high start / stop per hour
(75 per hour)

Provides winding protection

To improve winding insulation
Prevents dust & Spillage of water

Auto ON and OFF.



TECHNICAL DATA


Flow Q max 160 lpm
Head H max 60mtr
Liquid temp up to 60 Deg C
Suction Lift up to 7 mtr

PERFORMANCE TABLE

Model	Power		Pipe size	m3/h l/min	0	1.2	2.4	3.6	4.8	6	7.2	8.4	9.6
	kW	HP			0	20	40	60	80	100	120	140	160
HMP 50	0.37	0.5	1"X1"	Head in Meter	28	20	14	8					
HMP 80	0.60	0.80	1"X1"		30	24	21	17	6				
HMP 100	0.75	1.00	1"X1"		40	34	30	26	16	6			
HMP 150	1.10	1.50	1"X1"		50	40	37	33	29	24	10		
HMP 200	1.50	2.00	1"X1"		60	50	48	43	37	30	24	15	6



INSTALLATION

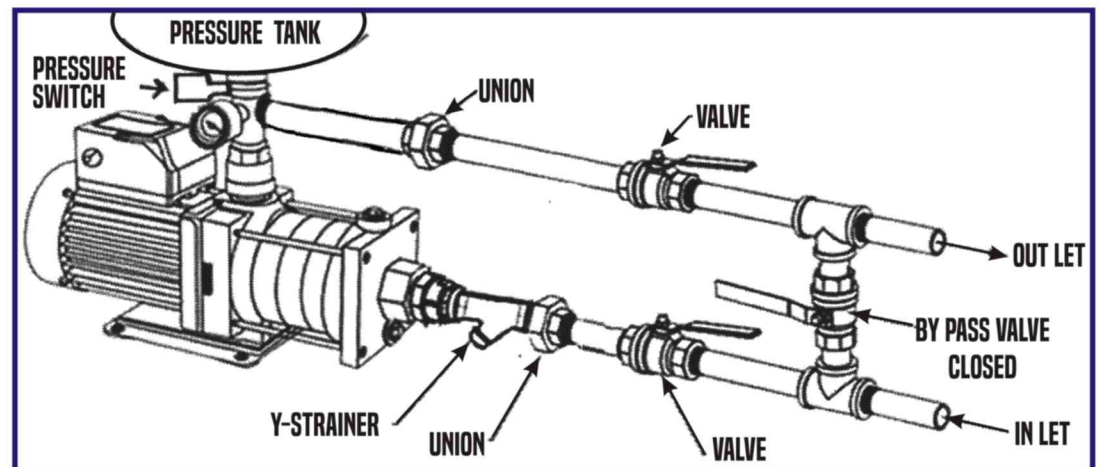

BY: